

**Product Name:** ZX104N-38-PLUG Mictor Breakout Adapter

**Product Description:** Mictor breakout adapter Plug 38 pin Tyco/AMP/TE. Designed in 4 layer PCBoard with improved signal integrity and crosstalk.

**In addition** to ALL Mictor signal being available at header, **dedicated** test points for I2C-SDA, I2C-SCL, +5V, GND is provided for direct connection

**"GND"** Header test points are connected to 2 inner layer GND plates **along with Mictor's center GND tap**. Please use this GND as your system GND reference.

**Application:** Bringup, testing, emulation, development, modular design evaluations, DDR qualification

**Mates with :** Any Tyco's 38 pin Mictor Socket offered at any height  
 2-767004-2 767096-8 767096-1 767110-1 767114-1 767114-8  
 767181-1 767054-1 767171-1 767081-1 767115-1  
 2-5767004 5767096-8 5767096-1 5767110-1 5767114-1 5767114-8  
 5767181-1 5767054-1 5767171-1 5767081-1 5767115-1  
 767130-1 767146-1 767146-8 767094-1 767178-1 767178-8 767154-1 767153-8 767095-1  
 5767130-1 5767146-1 5767146-8 5767094-1 5767178-1 1761316-8 5767154-1 5767153-8 5767095-1

767044-1 767007 767056 767111 767116 767117 767118 767119 5767006 5767044

Agilent 5346-6002 E5339A E5334A E5351A E5346-6002 E5346-63201

**Pitch:** 0.64mm (0.025") centerline contact spacing connector, Legacy Mictor High Speed connector

**Headers:** 0.1" (2.54mm) center, 0.025" SQ with 0.228" (5.8mm) post height


**ZX104N- Mictor 38 Plug pin configuration**

Layer												
TOP	J2	3	VG	GND	9	13	17	21	25	29	33	37
		1	5V	5	7	11	15	19	23	27	31	35
TOP	Mictor_Plug J1	1, 3, 5, 7, 9, .. 37										
BOTTOM		2, 4, 6, 8, 10, .. 38										
BOTTOM	J3	4	DA	6	8	12	16	20	24	28	32	36
		2	CK	GND	10	14	18	22	26	30	34	38
Header numbering refers to the Mictor's pin number												
"GND" header pins are connected to the 2 internal ground layers as well as top/bottom GND fills.												
		1	5V	Mictor standard naming convention for use with Logic Analyzer								
				Header is assigned to Mictor pin #1								

**Notice**

ALL ZEBAX TECHNOLOGIES DESIGN SPECIFICATIONS, DRAWINGS, PUBLICATIONS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." ZEBAX MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NO INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, Zebax Technologies assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication replaces all other information previously supplied. Zebax Technologies products are not authorized as in life support devices or systems.

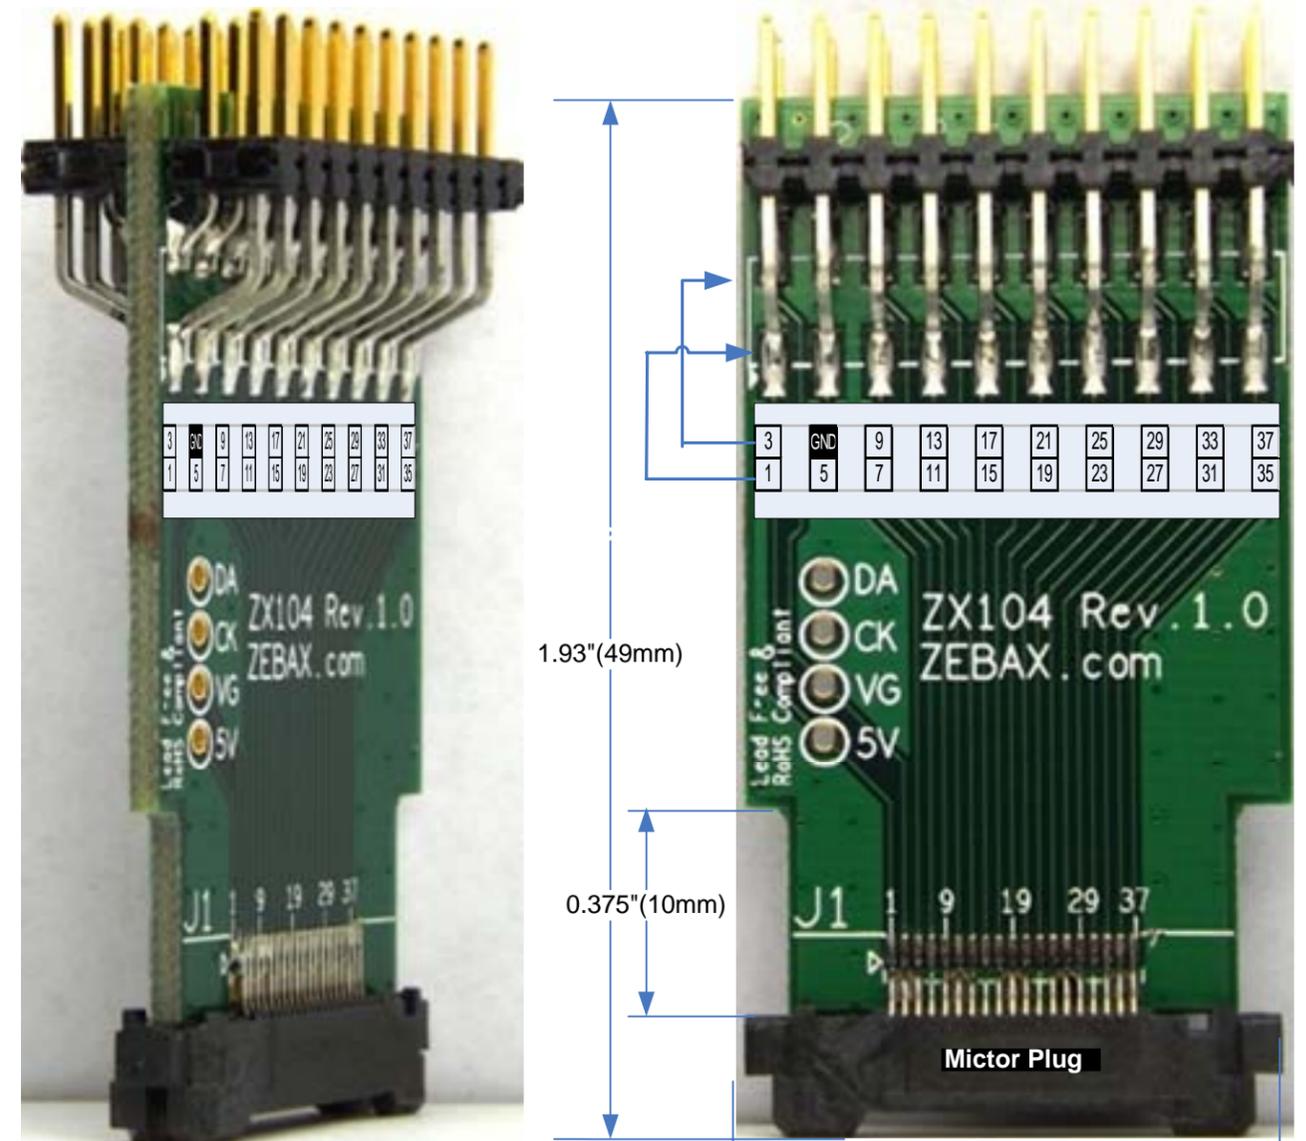

Test Point	Mictor pin #	Duplicate pin # at header	Function*
DA	4	DA/4	I2C Data
CL	2	CL/2	I2C Clock
VG	3	VG/3	Ground
5V	1	5V/1	Supply

\*" Reserved specific board design function, not applicable to all designs.  
 GND TP is connected to Mictor's GND center tap as well as 2 internal ground planes.

Note  
 ALL ZEBAX products are RoHS compliant and Lead Free unless otherwise indicated.

**ZEBAX TECHNOLOGIES**  
 SANTA CRUZ, CA U.S.A (831) 222-0717  
 WWW.ZEBAX.COM

SPECIFIED DIMENSIONS ARE INCHES (MM). ROHS COMPLIANT	ASSEMBLY DRAWING	
	ITEM: ZX104N-38-PLUG	
DESCRIPTION: Mictor breakout adapter 38 pin Plug		
CHECKED: M. MARINA	DRAWN: SLAVIK	REVISION: 1.0 SHEET: 1 OF 1