

Product Name: ZX118LSHM-40 Samtec Breakout Adapter Rugged Hermaphroditic Razor Beam – Page 1 OF 3

Product Description: ZX118LSHM-40 is Samtec LSHM connector breakout adapter. ZX118LSHM-40 is designed for real-time electrical test & measurements, signal integrity , characterization, manufacturing loopback test applications.

ZX118LSHM-40 is breakout adapter, supporting Samtec LSHM Rugged Hermaphroditic Razor Beam 0.5mm ( 0.02" ) pitch connectors, providing full access to all LSHM connector signals for purpose of test & measurement. ZX118LSHM-40 designed configured where J1 pin 1 is connected to J2 pin 2. The ZX118LSHM-40 would be transparent when mated with Host & Target due to its design by swapping the J1 to J2 pins. Please refer to figures 2.1 and 2.2 on **page 2** for detailed pin to pin configuration.

- 1- Provides access to all Samtec LSHM signals via onboard standard 0.1" pitch headers.
- 2- Passthrough design where J1 pin 1 is connected to pin 2 of J2.
- 3- Listed number adjacent to each Header's pin would be in reference to the Host system's Samtec LSHM connector pin numbering.
- 4- All traces are 50 Ohms impedance controlled.
- 5- Four, 4, layers PCB design, inner layers are GND planes.
- 6- Accessible GND test point, The test point is connected to inner GND planes as well as the connector's shield.
- 7- Ease of interface with single channel and differential scope probes.
- 8- Flying lead wire assembly may be used for board to board interface – See ordering information

Electrical: Insertion loss > -3dB @6GHz  
Trace impedance: 50 Ω  
Operating Temperature: -55°C to +125°C  
Samtec Connector:  
Onboard Connector: LSHM-DH Shielded - 2 rows per 40 pins/row  
Mates with: Any Samtec LSHM -DV -DH -RH formfactor Hermaphroditic connector  
Pitch: 0.020" ( 0.50mm ) pin to pin pitch  
Plating: 10μ" ( 0.25μm )  
Header:  
Pitch: 0.1" ( 2.54mm ) pin to pin pitch  
Pin: Square 0.025" ( 0.635mm )  
Height: 0.24" ( 6mm )  
Plating: Gold Flash

Application: Manufacturing test measurement & re-use, bringup, testing , debugging

Mates with : Samtec Rugged Hermaphroditic Razor Beam LSHM  
Mates with any height & formfactor LSHM connector / cable assembly such as DV ( Straight ) DH ( Right Angle ) or RH ( Reverse Right Angle ).  
LSHM-140-01-F-DV-A-S LSHM-140-01-L-DV-A-S  
LSHM-140-01-F-DH-A-S LSHM-140-01-L-DH-A-S  
LSHM-140-01-F-RH-A-S LSHM-140-01-L-RH-A-S




Breakout Access : All ZX118LSHM-40 breakout adapters provide access to all Samtec LSHM connector via onboard headers.

ZX118LSHM-40 header pin assignments											
Bottom	J6	8	16	24	32	40	48	56	64	72	80
		6	14	22	30	38	46	54	62	70	78
	J5	4	12	20	28	36	44	52	60	68	76
		2	10	18	26	34	42	50	58	66	74
Top	J4	7	15	23	31	39	47	55	63	71	79
		5	13	21	29	37	45	53	61	69	77
	J3	3	11	19	27	35	43	51	59	67	75
		1	9	17	25	33	41	49	57	65	73
Header pin numbers refer to the SAMTEC LSHM connectors' pin numbers											


Notice

ALL ZEBAX TECHNOLOGIES DESIGN SPECIFICATIONS, DRAWINGS, PUBLICATIONS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." ZEBAX MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NO INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, Zebax Technologies assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication replaces all other information previously supplied. Zebax Technologies products are not authorized as in life support devices or systems.

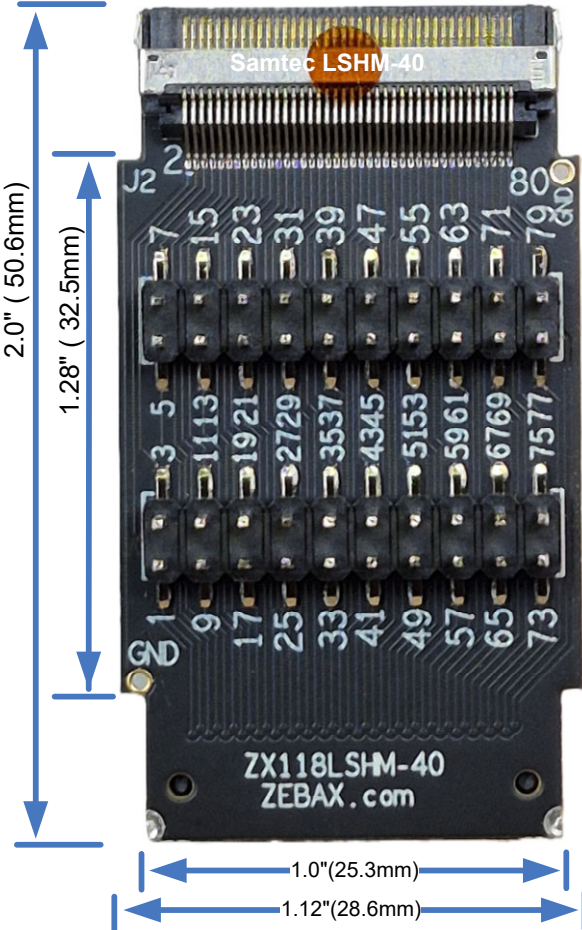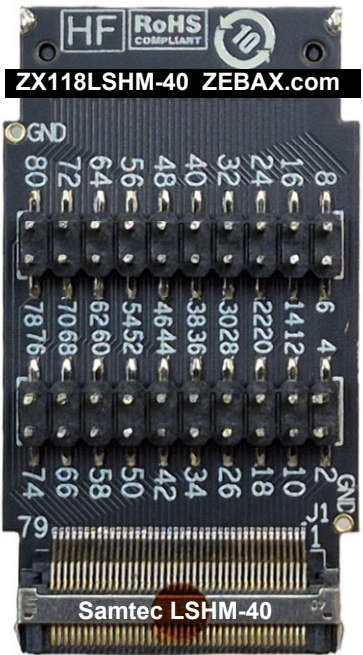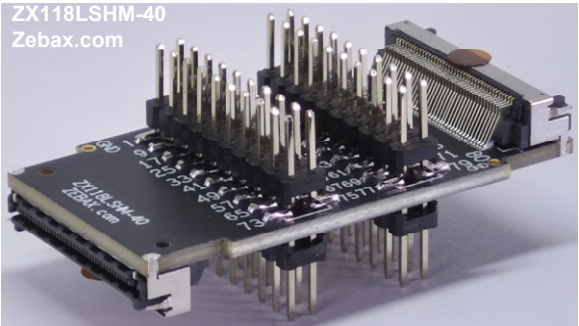

ZX118LSHM-40 simplified cross section diagram

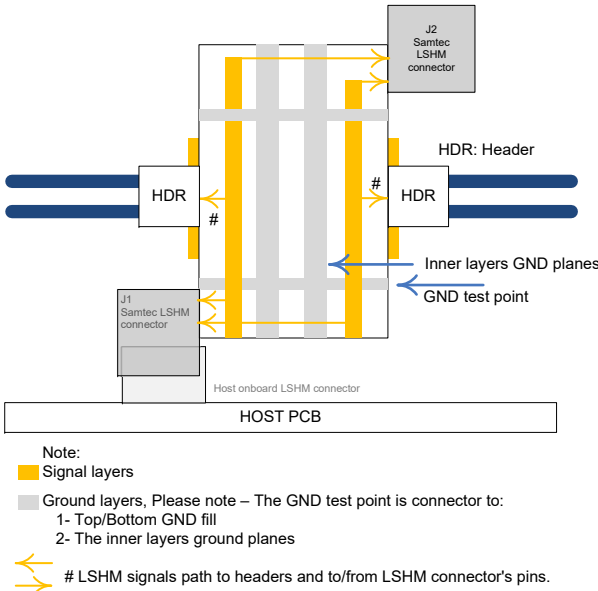

Compliance:

ISO2001 certified  
RoHs - Lead Free  
EU RoHS2  
UL E111594 document  
ELV- Vehicle Directive ( Directive 2000/EC)  
European Union Directive ( 203/11/EC )  
Halogen Free per IEC-61249-2.21 : 2003  
RoHs Directive 2011/65/EU  
WEEE Directive ( 2012/12/EU)

Certificate of Compliance for Radioactive substances  
Certificate of Compliance for Asbestos  
Certificate of Compliance for Ozone Depleting Substances, ODS  
Certificate REACH SVHC  
Certificate of Compliance RoHS\_EN\_CoC

ZX118LSHM-40 package includes:

Part number	Quantity	Description
ZX118LSHM-40	1	Breakout Adapter module
ZX100ACC-SS	0	Flying leads wire assembly

ZX100ACC-SS site page for ordering additional flying leads wire assembly

Note


ALL ZEBAX products are RoHS compliant and Lead Free unless otherwise indicated.

**ZEBAX TECHNOLOGIES**  
SANTA CRUZ, CA U.S.A ( 831 ) 2 2 2 – 0717  
WWW.ZEBAX.COM

SPECIFIED DIMENSIONS ARE INCHES (MM). ROHS COMPLIANT	ASSEMBLY DRAWING	
	ITEM:    ZX118LSHM-40	
DESCRIPTION:    Samtec rugged LSHM Hermaphroditic Razor Beam Breakout Adapter		
CHECKED: M. MAHIN	DRAWN: KADIJEH	REVISION: 1.0
		SHEET: 1 OF 3

**LSHM Hermaphroditic connector mating configuration:** LSHM connector is Hermaphroditic, self mating connector series, therefore ZX118LSHM-40 module would be transparent to any design using LSHM -DV or -DH connector series. Please see figure 2.1 exhibiting “Mated pin configuration details”. ZX118LSHM-40 utilizes LSHM-DH connector series where the J1 LSHM connector pin 1 is connected to the J2 LSHM connector pin 2. When the ZX118LSHM-40 is mated with Host & Target ( Host & Target using -DV or -DH connector series ), it would be transparent since the ZX118LSHM-40 does pin swapping between the onboard LSHM connectors. If using LSHM-RH connector series, please use figure 2.2 as reference identifying pin numbering on your host & target.


Figure 2.1: ZX118LSHM-40 mated pin configuration details

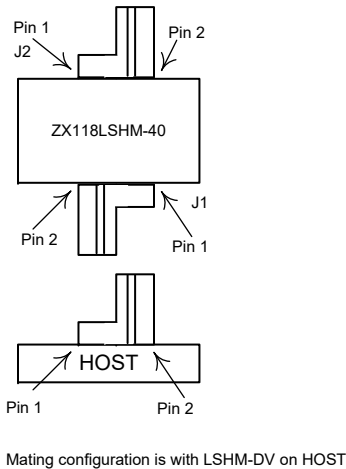

**ZX118LSHM-40 Pin numbering:** The listed Shunts pin numbering are listed as reference to the host LSHM connector. Since the ZX118LSHM-40 would be transparent to user ( see “**LSHM Hermaphroditic connector mating configuration**” section above ) the LSHM connector’s pin numbers would be identical to the host LSHM connector pin numbers as seen from ZX118LSHM-40’s J2 connector. Special care must be given if special rework required between the J1 & J2 LSHM connectors pins as the pin 1 , 3, 5, 7, 9, .. of J1 LSHM connector are connected to pin 2, 4, 6, 8, 10, .. of the J2 LSHM connector.

**Mated Pin Details:** Figure 2.2 exhibits LSHM connector family mated pin interface. -DV connectors are Straight , -DH connector series are Right Angle and the -RH are Reverse Right Angle connectors. All LSHM connector series mate with each other. However; attention must be paid to pin to pin interface ensuring expected design interface configuration. Below diagrams are provided as standard pin to pin interface configuration using LSHM Hermaphroditic connector series.

Figure 2.2 – LSHM Mated Pin Details – LSHM connector formactors are: -DV Straight , -DH : Right Angle , -RH : Reverse Right Angle

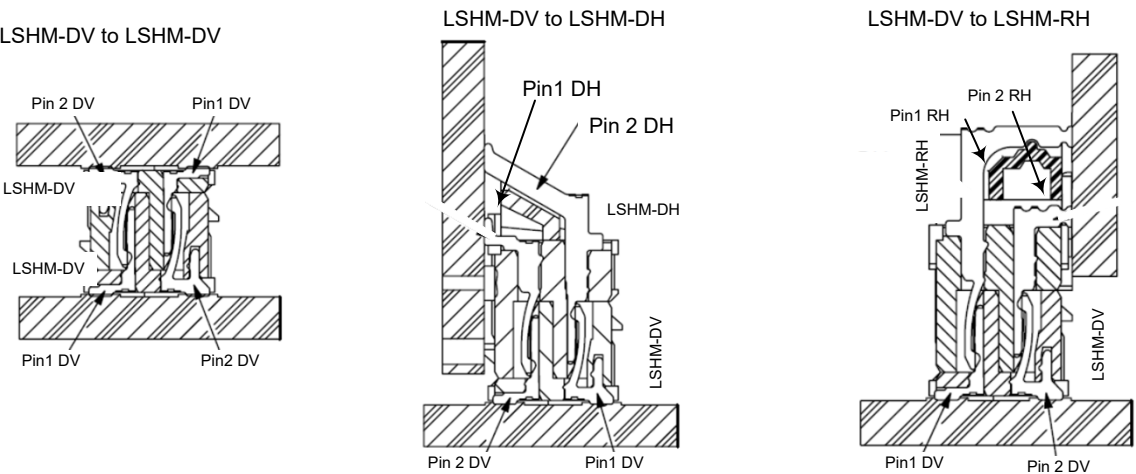

Notice

ALL ZEBAX TECHNOLOGIES DESIGN SPECIFICATIONS, DRAWINGS, PUBLICATIONS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, “MATERIALS”) ARE BEING PROVIDED “AS IS.” ZEBAX MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NO INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, Zebax Technologies assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication replaces all other information previously supplied. Zebax Technologies products are not authorized as in life support devices or systems.

Note  
ALL ZEBAX products are RoHS compliant and Lead Free unless otherwise indicated.

<b>ZEBAX TECHNOLOGIES</b> SANTA CRUZ, CA U.S.A ( 831 ) 2 2 2 – 0717 WWW.ZEBAX.COM		
SPECIFIED DIMENSIONS ARE INCHES (MM). ROHS COMPLIANT	ASSEMBLY DRAWING	
	ITEM: ZX118LSHM-40	
DESCRIPTION: Samtec rugged LSHM Hermaphroditic Razor Beam Breakout Adapter		
CHECKED: M. MAHIN	DRAWN: KADIJEH	REVISION: 1.0 SHEET: 2 OF 3

Product Name: ZX118LSHM-40 Samtec Breakout Adapter Rugged Hermaphroditic Razor Beam – Page 3 of 3

Signal Access : All LSHM-05 connector’s signals are accessible via onboard headers.

Ground : ZX118LSHM-40 is 4 layers PCB design where the inner layers are Ground layers. They are connected to the GND test points as well as top & bottom GND fills. For improved signal integrity, please connect the GND test point to system GND reference point. See Cross Section diagram for details.

Typical Application: ZX118LSHM-40 is designed for purpose of test and debugging at full connector’s bandwidth. It provides new approach in usage of breakout adapters by :

- 1- Utilizing single or differential scope probe.
- 2- Real-Time test and measurements, ability to interface DUT with test equipment or evaluation board for validation purposes.
- 3- Interface DUT with evaluation board for validation and pre-bringup.

Scope Probe wire Installation:

- 1- In order to avoid ground loop problems, please use the shortest Ground probe wire interfacing to the nearest GND reference point. ZX118LSHM-40 provides GND test point to be utilized as GND reference interface with host.

Note  
ALL ZEBAX products are RoHS compliant and Lead Free unless otherwise indicated.

<b>ZEBAX TECHNOLOGIES</b> SANTA CRUZ, CA U.S.A ( 831 ) 2 2 2 – 0717 WWW.ZEBAX.COM		
SPECIFIED DIMENSIONS ARE INCHES (MM). ROHS COMPLIANT	ASSEMBLY DRAWING	
	ITEM: ZX118LSHM-40	
DESCRIPTION: Samtec rugged LSHM Hermaphroditic Razor Beam Breakout Adapter		
CHECKED: M. MAHIN	DRAWN: KADIJEH	REVISSION: 1.0
		SHEET: 3 OF 3

Notice  
ALL ZEBAX TECHNOLOGIES DESIGN SPECIFICATIONS, DRAWINGS, PUBLICATIONS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." ZEBAX MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NO INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.  
Information furnished is believed to be accurate and reliable. However, Zebax Technologies assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication replaces all other information previously supplied. Zebax Technologies products are not authorized as in life support devices or systems.